

### C4FM/FM 144/430MHz DIGITAL/ANALOG TRANSCEIVER



# **Operating Manual**



# Contents

Introduction	1
Quick Guide	2
Controls & Connections Transceiver	
The Keypad Functions Display	5
Safety Precautions (Be Sure to Read)	. 8
About this manual	
Supplied Accessories and Options Supplied Accessories Available Options	11
Preparation Installing the Antenna Attaching the Belt Clip Installing the Battery Pack Removing the Battery Pack	12 12 12
Charging the Battery Pack Charging the Battery Pack using the Battery Charger Charging the Battery Pack using the Rapid Charger (SBH-28)	13 13
External Power Supply Connecting an External Power Supply for Use in Vehicle Connecting to an External Power Supply Using a Power Cable	13 13
Operation Turning the Transceiver ON Adjusting the Volume Level Adjusting the squelch setting Selecting a Frequency Band	14 14 15
Tuning to a Frequency Danu Changing the Frequency Step Selecting the Communication Mode Using AMS (Automatic Mode Select) function	15 15 16
Fixing the Communication Mode Transmission	17 17
Changing the Transmission Power Level Locking Keys and DIAL knob Programmable key function	18
Using the convenient Digital C4FM feature	
About the Digital Group ID (DG-ID) feature Communicating with the DG-ID feature Setting the transmit and receive DG-ID number to "00" for communicating with all other stations	19
using C4FM digital mode Communicating only with the specific members	
by setting the DG-ID number except for "00" About the GM(Group Monitor) feature Displaying the information of the other station received by GM (Group Monitor) function	21
Repeater Operation Communicating Via the Repeater Tone Calling (1750 Hz burst tone)	23
Using the Memory Registering to Memory Channels Recalling a Memory Channel Clearing Memories Recalling the Home Channels	<b>24</b> 25 25 26 26
Changing the Home Channel Frequency Split Memory Using Memory Tag Using Memory Bank	26 26 26
Scanning Function	27

VFO Scan	27 28 28 29 29
Convenient Functions	30 30 30
Using Set Mode	31 31 31 31 31 31 31 31
Restoring to Defaults (Reset) All Reset Set Mode Reset Specifications	34 34

Thank you for purchasing this Yaesu product.

- O The FT-70DR/FT-70DE is a handheld transceiver for operation in the 144 MHz and 430 MHz Amateur radio bands. It is compatible with the Analog FM and C4FM modes.
- O The FT-70DR/FT-70DE is rugged and compact (W60 × H98 × D33 mm (2.36" × 3.86" × 1.30")) providing splash, water, and dust resistant features conforming to IP54 for mobile and field operation.
- O The AMS (Automatic Mode Select) feature automatically selects the analog FM and C4FM digital modes, according to the signal of the other station.
- O With the GD-ID (Digital Group ID) feature (□19), the Group Monitor (GM) feature enables automatically locating, and communicating with other stations that have the same DG-ID number within contact range, by utilizing a matching group ID number from 00 to 99.
- O The Digital Personal ID (DP-ID) feature may communicate only by the transceivers registered the individual ID information that is different for each transceiver included in the transmission radio wave of C4FM digital communication.

Compatible with analog FM mode and C4FM digital modes	□16
Equipped with AMS (Automatic Mode Select) Feature	□16
The DG-ID function automatically checks to find if there are any stations with	
the GM function in operation on the same frequency within communication range	□19
The DP-ID feature may recall/standby only the other stations that are set with	
the C4FM Digital transceiver specific number.	□□30
High-brightness LED for easy viewing of the MODE/STATUS indicator	🖽 4
Dustproof and water-splash-resistant design, equivalent to IPX54, which protects	
the transceiver from dust and splashes	□□10
Wide-band reception over the range of 108.000 MHz to 579.995 MHz	□15
A wide variety of scan features	□ 27
A variety of individual selective calling functions; such as tone squelch (CTCSS) and DCS functions	□□30
Large-capacity 999 memory channels	□ 24
6 home channels and 50 pairs of PMS memory channels D26,	□□29
Create mnemonic tags for memory channels and Home channel	□□26
Connecting to an external power supply	🖽 4
Automatic power off (APO) feature turns the transceiver OFF after a preset time period	□131
Data terminal (Mini USB) for connection to a PC and firmware updates	🖽 4

We urge you to read this manual in its entirety, and also the Advance Manual (available for download on the Yaesu website), to gain a full understanding of the amazing capability of the exciting new **FT-70DR/FT-70DE** Transceiver.

# Quick Guide

### Names and display of Controls



### ① Turning the Power ON

Install the charged battery pack and then press and hold the 💿 switch.

### ② Inputting the Call sign

When turning the power **ON** for the first time after purchasing, input the call sign of your own station. Input call sign may be changed from the Set Mode [63 MYCALL]([] 33).

1. When turning the power ON for the first time after purchasing, the call sign input screen will be displayed.




2. Press the F.



- 3. Input the call sign.
  - Rotate the interview to select each character.
  - Press the EAND key to move the cursor to the right.
- 4. Repeat step 3 to input the remaining call sign characters.
  - Press we key to move the cursor to the left.
  - Press and hold the 🐨 key to erase all characters after the cursor.
- 5. Press the PTT((③)) switch to conclude inputting.

Normal operation (VFO Mode) screen will be displayed



### 3 Selecting the Operating Band

Press the BAND key.

# Tuning the frequency Rotate the The A state the A

### S Adjusting the volume

While pressing and holding the ..., rotate the to adjust the volume to a comfortable level.

### 6 Adjusting the squelch setting

The squelch level may be adjusted to mute the background noise when no signal is received.

- 1. Press the 📧 key, and then press the 🕅 key.
- Rotate the is to adjust the squelch to a level at which the background noise is muted.
- \* When the squelch level is increased, the noise is more likely to be silenced, but it may become more difficult to receive weak signals.
- 3. Press the PTT ((③)) switch to save the setting.

#### © Selecting the Communication Mode

The communication mode is automatically selected to correspond to the signal being received.


Press the MODE key to manually select the communication mode ([]17).

#### Transmitting/Receiving Signals

- Transmitting While pressing and holding the PTT ((S)) switch, speak into the microphone.
- Receiving Release the 🛞 to return to receive mode.

# **Controls & Connections**

### Transceiver

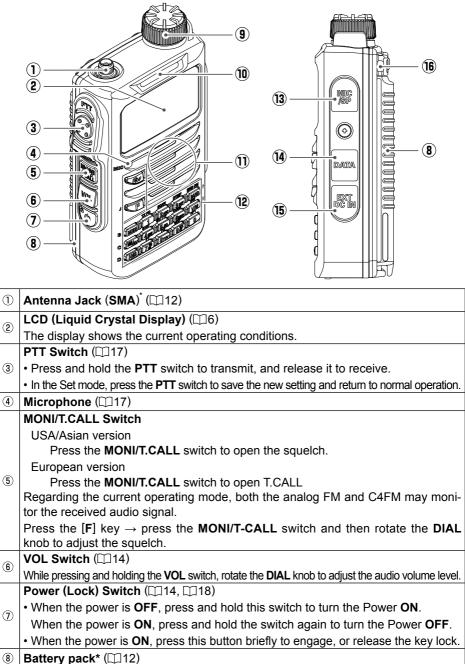

	DIAL Knob (🛙	746)						
	• Rotate the <b>DIAL</b> Knob to change the frequency or select a memory channel.							
(9)		•		•				
9	While pressing and holding the VOL Switch, rotate the DIAL knob to adjust the							
	audio volume level.							
	Rotate the <b>DIAL</b> Knob to select the desired entry for set mode.							
	MODE/STATU							
		ansmit/receive status, and the com	nmunication mo	de with the high				
	brightness LED							
		Communication status	Left portion	Right portion				
		Analog FM mode Digital C4FM mode		Green Blue				
	Receiving	Digital Data	Green	White				
	Receiving	Receiving signals with unmatched DG-ID,	Ciccii	VIIILE				
10		DP-ID, tone frequency or DCS code		Blink in blue				
	<b>T</b>	Analog FM mode	D - d	Red				
	Transmitting	Digital C4FM mode	Red	Blue				
	CM function	The other station is within the com-		Light Blue				
	GM function during opera-	munication range	_					
	tion	Transmitting GM confirmation signal to the other station within the commu-		Blue				
		nication range		2.00				
11)	Speaker							
	Speaker View of							
12	<b>Keypad</b> The functions of the keypad are described in detail on page 5.							
	MIC/SP jack*							
	•	eaker microphone or earpiece micro	ophone to this is	ack.				
	<ul> <li>Connect a speaker microphone or earpiece microphone to this jack.</li> <li>Connect the optional Clone Cable (CT-27), to transfer saved data and function</li> </ul>							
		other <b>FT-70DR/DE</b> transceiver.						
13	Do not connect any microphone which is not specified by Yaesu.							
	A malfunction may can result.							
		external microphone or cable is connected	d, the dust and spl	ash protection does				
not function.								
DATA Terminal*								
	When updating the firmware, connect to a PC using a USB cable.							
14	* When a new firmware update for the FT-70DR/DE is available, download the							
	data from the	0DR/DE to the I	latest version.					
	* NOTE: the optional camera-equipped microphone (MH-85A11U) is not supported.							
	EXT DC IN Jac	ck*(□13)						
(15)	When charging	g the battery pack, connect the batte	ery charger to th	nis jack.				
1	• Connect an external power supply adapter with a cigarette lighter plug (SDD-13)							
	or an external power cable (E-DC-6) to this jack.							
16	Strap Hole (🕮	]12)						

\*: When the included antenna and battery pack are installed and the MIC/SP jack, DATA terminal, and EXT DC IN jack are securely covered with rubber caps, the FT-70DR/DE meets the waterproofing performance conforming to IP54.

### **The Keypad Functions**

Kau	Primary Function (Press Key)		Secondary Func-	Third Function	
Key	VFO or Memory Recall	Inputting Memory Tag	tion (Press F + Key)	(Press and Hold for over one second)	
GM	Turns the GM (Group Monitor) function <b>ON/OFF</b>	Press and hold this key to erase all char- acters after the cursor	_	Turns the GM (Group Monitor) function <b>ON/OFF</b>	
G	Activates the "Sec- ondary" key function ( <b>□</b> appears)	Press this key to complete memory tag in the Set Mode	Deactivates the "Sec- ondary"key function (I disappears)	Enters the Set mode.	
MODE	Selects the receive mode between FM(AM), DN and VW*	Moves the cursor to the left.	Switches between the frequency display and the memory tag display	Sets the DG-ID number	
HM/ RV	Reverses the transmit and receive frequen- cies while working through a repeater	_	Recalls the "HOME" (favorite frequency) channel	Overwrites the "HOME" (favorite frequency) channel	
AMS	Selects AMS Mode (TX AUT/TX FM/TX DIG)	_	-	Activates the AMS feature	
BAND (BND DN)	Moves operation to the next-highest fre- quency band	Moves the cursor to the right	Moves operation to the next-lowest fre- quency band	_	
<b>V/M</b> (DW)	VFO mode and the to complete the memo- Enables the Dual Re- Wr		Activates the "Memory Write" mode (for mem- ory channel storage)		
<b>1</b> (TX PO)	Number "1"	Number "1"	Selects the desired transmit power output level.	Enters all the zeros at once after entering the number "1" on inputting the frequency.	
2 (SCAN)	Number "2"	Number "2", or char- acters "A", "B", or "C"	Starts the scanning	Enters all the zeros at once after entering the number "2" on inputting the frequency.	
<b>3</b> (DTMF)	Number "3"	Number "3", or char- acters "D", "E", or "F"	Selects the DTMF mode.	Enters all the zeros at once after entering the number "3" on inputting the frequency.	
4 (STEP)	Number "4"	Number "4", charac- ters "G", "H", or "I"	Selects the frequency steps	Enters all the zeros at once after entering the number "4" on inputting the frequency.	
5 (SQ TYP)	Number "5"	Number "5", charac- ters "J", "K", or "L"	Selects the squelch types	Enters all the zeros at once after entering the number "5" on inputting the frequency.	
6 (CODE)	Number "6" Number "6", or char- Selects the CICSS after		enters all the zeros at once after entering the number "6" on inputting the frequency.		
7 (P1)	Number "7"	Number "7", or char- acters "P", "Q", "R", or "S"	P1 (programmable key 1)	enters all the zeros at once after entering the number "7" on inputting the frequency.	
8 (P2)	Number "8"	Number "8", or char- acters "T", "U", or "V"	P2 (programmable key 2)	enters all the zeros at once after entering the number "8" on inputting the frequency.	
<b>9</b> (SKIP)	Number "9"	Number "9", or char- acters "W", "X", "Y", or "Z"	Selects the Memory Scan "Skip" channel or "Select" channel	enters all the zeros at once after entering the number "9" on inputting the frequency.	
<b>0</b> (RPT)	Number "0"	Number "0", or sym- bols"(space)", "-", "/", "?", or "!"	Selects the direction of the up link frequency shift (either "–", "+", or "simplex") during repeater operation.	enters all the zeros at once after entering the number "0" on inputting the frequency.	

\*: VW icon is displayed when Set Mode [16 DIG VW] (D 32) is set to "ON" (the default setting is "OFF").


# Display

#### Frequency / Memory Tag / Set Mode Item

Memory Channel Number / HOME Channel / Memory Bank Number/ In Range / Out of Range

(GM function)

Volume Bar Graph



Communication Mode -

- DN: Normal digital mode
- VW: Voice wide mode

FM: Analog FM mode

AM: AM mode (Receive only)

S Meter : Displays the received signal strength PO Meter : Displays the transmit power level

lcon	Description		
GN	Appears when the GM (Group Monitor) function in the digital mode is enabled.		
	<ul> <li>Memory channel registered as a skip memory</li> <li>Memory channel registered as a specified memory (with blink)</li> </ul>	□ 29	
PRI	Priority Memory Channel	[]]29	
88	Repeater Shift Direction Split Memory (a simultaneously)	□□23 □□26	
T SQ	<ul> <li>T : Appears when the tone encoder function in the analog FM mode is enabled.</li> <li>T SQ : Appears when the tone squelch function in the analog FM mode is enabled.</li> </ul>	□30	
DCS	Appears when the DCS function in the analog FM mode is enabled.		
PAG	Appears when the PAGER function is enabled.		
	The battery condition is displayed in 4 steps. (No display) : Full battery power : Enough battery power : Battery is depleted. Charge battery. : (When blinking) Charge battery immediately.	□13	

lcon	Description				
	<ul> <li>Appears when a function key is pressed.</li> <li>On writing the memory channel, etc.</li> </ul>				
AMS	Appears when the AMS (Automatic Mode Select) function is en- abled. It is recommended that AMS function be enabled for nor- mal operations.			[]]16	
	TX Power Leve	el Indicator (L	OW/MID TX Power Selected)		
	Tx Power	Icon	TX Power Meter during transmission		
LOW	HIGH (5 W)	(No display)		[]]18	
	MID (2 W) LOW (0.5 W)	LOW			
		LOW			
DW	Appears when	the Dual Rec	eive(DW) function is enabled.	[]]29	
U	Appears when the APO (Automatic Power-Off) function is enabled.				
V	Appears when the bell function in the analog FM mode is enabled.				
6	Appears when the lock function is enabled.				
DN	V/D mode (Normal digital mode)				
VW	Voice FR mode (Voice wide mode)			□17	
FM	Analog FM mode			□17	
FiM	AM mode (Receive only)			□17	
₿	DTMF Autodialer Active –				

# Safety Precautions (Be Sure to Read)

#### Be sure to read these important precautions, and use this product safely.

Yaesu is not liable for any failures or problems caused by the use or misuse of this product by the purchaser or any third party. Also, Yaesu is not liable for damages caused through the use of this product by the purchaser or any third party, except in cases where ordered to pay damages under the laws.

#### Types and meanings of the marks

Types and meanings o				
Anger Danger	This mark indicates an imminently hazardous situation, which, if not avoided, could result in death or serious injury.			
	This mark indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.			
		ootentially hazardous situation, which, if not avoid- or moderate injury or only property damage.		
Types and meanings o	f symbols			
		is, which must not be done to use this product product should not be disassembled.		
		which must be done to use this product safely. For g should be disconnected.		
	DA	NGER		
Do not use this product transmitters are prohil hospital, airplane, or tr. This product can affect elec	bited, e.g., inside of a ain.	Do not use this product or the battery char- ger anywhere inflammable gas is produced. A fire or explosion can occur.		
Do not transmited electronic of medical devices. Do not transmit with this device while carry- ing or using a medical appliance such as a cardiac pacemaker. When transmitting, use an external antenna and keep as far as pos- sible away from the external antenna. The radio wave emitted by the transmitter can cause the medical device to malfunction and result in injury or death.		Do not use this product while riding a bicycle or driving a car. Accidents can result. Be sure to stop the bicycle or car at a safe place before using this product. Do not touch any material leaking from the LCD display or the battery pack with bare hands. The chemical may adhere to your skin or enter		
Do not transmit with th place for the safety of Cal device such as a ca The radio wave emitted cause the medical dev result in injury or death.	persons using a medi- irdiac pacemaker. I from this product can	your eye, and cause chemical burns. In such a case, consult the doctor immediately. Do not solder or short-circuit the terminals of the battery pack. A fire, leak, overheating, explosion, or ignition may result.		
If thunder and lighte when an external anten ly turn this transceive the external antenna fro A fire, electrical shock, o	na is used, immediate- r OFF, and disconnect om it.	Do not carry the battery pack together with a necklace, hairpin, or small metal objects. A short circuit can result.		
	<b>WA</b>	RNING		
An injury, electric shock	or make any alteration k, or failure may result. ttery pack or charger	Keep the terminals of the battery pack clean. If terminal contacts are dirty or corroded, a fire, leak, overheating, explosion, or ignition		

An injury, leak, fire, or failure may result.

If smoke or a strange odor is emitted from Do not make very long transmissions. the main body, battery pack, or battery The main body of the transceiver may overcharger, immediately turn the transceiver heat, resulting component failure or operator off; remove the battery pack, and remove burns. the power plug from the outlet. Do not place the transceiver in wet or damp A fire, chemical leak, overheating, component areas (e.g. near a humidifier). damage, ignition, or failure may result. Con-This may result in fire, electric shock and tact the dealer from which you purchased this equipment failure. product or Yaesu Amateur Customer Support. Do not use DC power cords other than the Do not bend, twist, pull, heat and modify one enclosed or specified. the power cord and connection cables in This may result in fire, electric shock and an unreasonable manner. equipment malfunctions. This may cut or damage the cables and result When connecting a DC power cord, be cerin fire, electric shock and equipment failure. tain the positive and negative polarities are Do not pull the cable when plugging and correct. unplugging the power cord and connec-Reverse connection will result in equipment tion cables. damage. Always hold the plug or connector when Disconnect the power cord and connection unplugging; if not, a fire, electric shock and cables before installing separately sold acequipment failure may result. cessory items, or replacing the fuse. Do not use the device when the power This may result in fire, electric shock and cord and connection cables are damaged, equipment failure. or when the DC power connector cannot Follow the instructions provided when inbe plugged in tightly. stalling items sold separately and replacing Contact Yaesu Amateur Customer Support the fuse. or the retail store where this transceiver was This may result in fire, electric shock and purchased for assistance, as this may result equipment failure. in fire, electric shock and equipment failure. Use only the provided or specified screws. Never cut the fuse holder off of the DC Using screws of a different size, may result in power cord. fire, electric shock and component damage. This may cause a short circuit and result in Do not place the transceiver in a confined ignition and fire. space, such as a bookshelf which is not Use only the specified type fuses. ventilated well. Use of an incorrect fuse may result in fire and This may result in overheating and fire, electric equipment failure. shock and equipment failure. Do not install the front panel, the transceiv-Do not operate the transceiver on a carpet er or the wire cables near the automobile or a blanket. air bags. This may result in overheating and fire, electric In case of an accident, the transceiver may shock and equipment failure. interfere with air bag deployment and result If a foreign substance is spilled into the in extreme injury. The wire cables may also transceiver, turn it OFF immediately and cause the air bag to malfunction. remove the power plug from the outlet. Do not power this transceiver with a volt-If used as it is, a fire, electrical shock, or damage other than the specified power supply age may result. voltage. A fire, electric shock, or damage may result. CAUTION Do not wipe the case using thinner and Do not place the transceiver on an unbenzene etc. steady or sloping surface, or in a location Use only a soft, dry cloth to wipe stains from with extreme vibration. The transceiver may fall or drop, resulting in the case. fire, injury and equipment damage. Do not throw the transceiver, or subject it Do not place this transceiver in a humid or to strong impact forces. Physical abuse may result in component damdusty place. age and equipment failure. A fire or failure may result Do not use the transceiver near the radio If the transceiver will not be used for an relay equipment. extended period, turn it OFF and remove the battery pack for safety. Transmissions may affect radio communication.

Keep magnetic cards and videotapes away from the transceiver.	Do not use the transceiver in a crowded place. The antenna may strike others and result in an injury.		
The data recorded on cash cards or video- tapes may be erased.	Keep this product out of the reach of children.		
Do not place this transceiver in direct sun- light or near a heater. The case may be deformed or discolored.	Injury to the child, or damage to the transceiver may result.		
Be sure to check with the manufacturer of any hybrid or fuel-saving automobile re-	Do not use any products other than the specified options and accessories. Failure or miss operation may result.		
<b>garding use of the transceiver in that car.</b> Noise generated by an onboard electrical device (inverter, etc.) can disrupt the normal operation of the transceiver.	Install the hand strap and belt clip securely. Improper installation may cause the FT- 70DR/ FT-70DE to fall or drop, resulting in an injury or damage.		
Do not operate the transceiver near the TV or radio. Radio disturbance can occur in the transceiv- er, the TV, or the radio.	This product has a waterproof structure and conforms to "IP54" when the included antenna and battery pack are installed and rubber caps are securely attached to the		
<b>Do not transmit near the television and radio.</b> Transmissions may cause electromagnetic interference.	MIC/SP jack, EXT DC IN jack, and DATA terminal. If this transceiver gets wet, dry it with a soft cloth, do not leave it exposed to		
While transmitting, keep the antenna as far from you as possible. Long-time exposure to electromagnetic waves may have a negative impact on your health.	the moisture. Exposure to excessive moisture may degrade the transceiver performance, shorten its life, or cause a failure or electrical shock.		
Do not dangle or throw the transceiver by holding its antenna. This may injure others and may also result in damage and failure of the transceiver.	Before discarding a depleted battery pack, affix tape or insulating covering to its terminals.		
About Splash, Water, and Dust Resi	stant Features Conforming to IP54		
When the included antenna and battery pack are installed, and the MIC/SP jack, EXT DC IN jack and DATA terminal are securely covered with rubber caps, this product is dust and splash resistant. To ensure continued Splash, Water, and Dust Resistant Features be sure to check the			

following points before each use.

Check for damages, deterioration, and dirt. Antenna rubber, key switch rubber, MIC/SP jack, EXT DC IN jack, DATA terminal rubber cap, and battery pack seals.

#### Cleaning

Wipe with a dry soft cloth.

When this product is contaminated with seawater, sand or dirt, clean it with a soft damp cloth immediately.

#### Recommended maintenance interval

To insure continued optimal performance, it is recommended that maintenance be performed annually, or when any damage or deterioration is found. Note that the maintenance service is subject to fees.

#### Do not pour or immerse this product in the following liquids: Sea, pool, hot spring, water containing soap, detergent, or bath additive, alcohol, or chemicals.

#### Do not leave this product for an extended time in a very humid location:

Bathroom, kitchen, or humid place.

#### ☐ Other precautions

Do not remove the rubber cap from the battery pack, the MIC/SP jack, the EXT DC IN jack, or the DATA terminal when water drops have accumulated on the transceiver, or when it is placed in a wet environment. This may result in water penetrating the transceiver, and causing equipment failure.

This product is not totally waterproof, and must never be immersed in water.

Reference icon symbols and conventions are used in this manual. Their meanings are described in the below chart.

Symbols	Description		
!	This icon indicates cautions and information that should be read.		
í	This icon indicates notes, tips and information that should be read.		
	This icon indicates other pages containing relevant information.		
	This icon indicates FT-70DR/DE Advance Manual on the YAESU Website containing relevant information.		

- The settings at the time of purchase are referred to as the "default" or "default settings".
- The names of Set Mode items displayed in the LCD, and the key names of the transceiver appear in bold characters.

# **Supplied Accessories and Options**

#### **Supplied Accessories**

<ul> <li>7.4 V, 1800 mAh Rechargeable Li-Ior</li> <li>Battery Charger</li> </ul>	Battery Pack	SBR-24LI SAD-18B <sup>*1</sup> SAD-11C/F	/U* <sup>2</sup>	
<ul> <li>☐ Antenna</li> <li>☐ Operating M</li> <li>☐ Belt Clip</li> <li>☐ USB cable</li> </ul>	lanual (this m	anual)	Warranty C SBR-24LI	
<ul> <li>Ensure that the name of the deapurchase are indicated on the war</li> <li>If any item is missing, contact the of</li> </ul> Available Options	ranty card.		•	and the date of
7.4 V, 1800 mAh Rechargeable Li-Ior	Battery Pack	SBR-24LI		
Battery Charger		SAD-18B*1		
		SAD-11C/F	/U*²	
Rapid Charger		SBH-28		
DC Cable with and Cigarette-Lig	hter Plug	SDD-13		
DC Cable		E-DC-6		
Speaker / Microphone	MH-34B4B	Earpiece	e Microphone	SSM-57A
VOX Headset	SSM-63A	Microphe	one Adapter	CT-44
BNC-to-SMA Adapter (BNCJ-SMAP)	CN-3	Soft Cas	e	SHC-27
	CT-27			

\*2 "B" suffix is for use with 120 VAC (Type-A plug), "C" suffix is for use with 230-240 VAC (Type-C plug), "F" suffix is for use with 220 VAC, "H" suffix is for use with 220-230 VAC (Australian plug), and "U" suffix is for use with 230 VAC (Type-BF plug).

Availability of accessories may vary. Some accessories are supplied as standard to meet local requirements, while others may be unavailable in some regions. Consult your Yaesu Dealer for details regarding these and any newly-available options. Connection of any accessory not approved by Yaesu, should it cause damage, may void the Limited Warranty on this apparatus.


# Preparation

### Installing the Antenna

- 1. Turn the antenna clockwise until it is secured.
  - Do not hold or twist the upper part of the antenna when installing or removing it. To do so may break the conductors inside the antenna.
  - Do not key the transmit without installing the antenna. The transmitter components may be damaged.
  - When using an antenna other than the one supplied, or connecting to an external antenna, ensure that the SWR is adjusted to 1.5 or lower.

### Attaching the Belt Clip

- 1. Attach the belt clip on the back of transceiver using the supplied screws (two).
  - Be sure to use the supplied screws when attaching the belt clip. If any other screws are used, the belt clip cannot be secured firmly to the battery pack and the transceiver may drop off together with the battery pack; the transceiver and battery pack may fall off, causing injury, breakage and other damage.
  - Use a hand strap which can withstand the weight of the transceiver. If the hand strap is not strong enough, the it may break and the transceiver may fall, causing injury, breakage and other difficulty.



lold the thick base


of the antenna

### **Installing the Battery Pack**

- Lift the belt clip outward (①) and Insert the battery pack into the seals of the battery compartment on the back of the transceiver.
- 2. Push the battery pack in until the battery latch clicks securely (②).
- Slide the battery pack lock plate to the "UNLOCK" position beside the battery latch until the entire "LOCK" appears.

### **Removing the Battery Pack**

- Slide the battery pack lock plate to the "UNLOCK" position.
- 2. Push the release button (PUSH) and tilt the Belt Clip outward, and then remove the battery pack.



Lock




### Charging the Battery Pack using the Battery Charger

Using the supplied battery charger (SAD-18B or SAD-11), it takes about 6 hours\* to charge the SBR-24LI battery pack fully.

- \*: Depending on the battery status, the charging time might be increased.
- 1. Turn the transceiver **OFF** to install the battery pack.
- Referring to the figure at the right, connect the battery charger plugs.
   When the battery is being charged, the left side of the MODE/STATUS Indicator lights red, and "CHGING" is dislapved.
- When charging is completed, the display will change to indicate "CHGFUL" and the MODE/ STATUS Indicator will light green.

i



- In the USA Version, the MODE/STATUS Indicator is not lit when charging or when charging is complete.
- The charging icon blinks, and charge progress is shown on the S/PO bar graph " meter during charging.
- When charging is completed, the charging is automatically ended.
- If "CHGERR" appears on the LCD during the charging and the battery pack is not charged after a lapse of 10 or more hours, stop charging the battery pack immediately. The battery pack is presumed to be at the end of its service life, or defective. In this case, replace the battery pack with a new one.
- Charge the battery pack within the temperature range from +5 °C to +35 °C (+41 °F to +95 °F).

### Charging the Battery Pack using the Rapid Charger (SBH-28)

For details on the Rapid Charger (SBH-28), see Optional SBH-28 manual.

 Approximate Operating Time and Remaining Charge Level Indication Approximate operating time for the transceiver with the fully charged lithium-lon battery pack (SBR-24LI), and the indication of the remaining charge level of the battery is shown in the below table:

Frequency band	Band in Use Charge	Level Indication (Icon)	
144 MHz band	Approx. 8 hours	(No display) :Full battery power Enough battery power	
430 MHz band	Approx. 7 hours	Battery is depleted. Charge battery. :(When blinking) Charge battery immediately.	

The battery charge level calculations are based on an operating cycle of: Transmitting 6 seconds (5 W): Receiving 6 seconds (VOL Level 16): Stand By 48 seconds (RX SAVE 1:5)

The actual times the transceiver will operate as indicated in the above table, varies depending on use, conditions, ambient temperature, etc.

### **External Power Supply**

### Connecting an External Power Supply for Use in Vehicle

The optional DC Cable with Cigarette-Lighter plug (SDD-13) allows power to be supplied from a motor vehicle type cigarette lighter socket.

#### **Connecting to an External Power Supply Using a Power Cable**

The optional DC cable (E-DC-6) allows the transceiver to be connected to an external DC power supply.

# Operation

### **Turning the Transceiver ON**

- 1. Press and hold the **Power** (Lock) switch to turn the transceiver **ON**.
- Turning the transceiver OFF Press and hold the Power (Lock) switch again to turn the transceiver OFF.
- Inputting the call sign

The first time the transceiver is turned ON after it is purchased; input your own call sign.

Inputting characters

Input the callsign with the ten key or **DIAL** knob.

- Rotate the **DIAL** knob to select any of the 38 available characters:.
  - $\cdots \leftrightarrow 0 9 \leftrightarrow \mathbf{A} \mathbf{Z} \leftrightarrow (\text{space}) \leftrightarrow \mathbf{A} \cdot \mathbf{A} \rightarrow \mathbf{A} \cdot \mathbf{A} \rightarrow \mathbf{A$
- \* The " " and " / " may not be input for the first callsign character.
- Press the keys repeatedly to toggle among the four available characters associated with that key. For example: pressing the [2] repeatedly will toggle through  $A \rightarrow B \rightarrow C \rightarrow 2 \rightarrow A \cdots$
- Moving the cursor and deleting the input characters:

[BAND] key: Moves the cursor to the right


[MODE] key: Moves the cursor to the left

[GM] key: Press and hold to erase all characters after the cursor


- Saving the inputted call sign: Press the [F] key or the PTT switch
  - The Call Sign ID can be changed using set mode item [63 MYCALL] ([] 33).
  - Up to 10 characters can be entered.
  - Characters that may be inputted for the call sign are the numbers 0-9, letters "A Z" in upper case, the hyphen and the slash.


### Adjusting the Volume Level

1. While pressing and holding the **VOL** knob, rotate the **DIAL** knob to adjust the volume to a comfortable level.











### Adjusting the squelch setting

The squelch level may be adjusted to mute the background noise when no signal is present.

- 1. Press the **[F]** key and then press the **MONI/T-CALL** switch.
  - "SQL  $\square$ " (0 15) appear on the display.
- 2. Rotate the **DIAL** knob to adjust to a level at which the background noise is muted.
- 3. Press the PTT switch to save the setting.




• The default setting is "SQL 1"

• To recall the HOME channel of each frequency band touch [HM/RV] key.

### **Selecting a Frequency Band**

1. Press the [**BAND**] key to select the desired frequency band.



Frequency ranges for each frequency band are below:



Press the [F] key, then press the [BAND] key to switch the frequency bands in reverse order.

### **Tuning to a Frequency**

DIAL knob

1

By pressing the **[F]** key and then rotating the **DIAL** knob, the frequency will change in 1 MHz steps.

The numeric keys

Press the numeric keys to enter the frequency digits in order, beginning with the 100 MHz digit.

#### Examples:

ľ

```
To enter 145.520 MHz, press [1] \rightarrow [4] \rightarrow [5] \rightarrow [5] \rightarrow [2] \rightarrow [0]
To enter 400.000 MHz, press [4] \rightarrow [0] (press and hold); or [4] \rightarrow [V/M]
```

When entering a frequency using the numeric keys, it may be canceled by pressing the PTT switch.

#### Changing the Frequency Step

The **DIAL** knob rotation frequency step may be changed. Normally, the factory default setting will provide a good frequency step.

- 1. Press the [F] key and then press the [4] (STEP) key, and rotate the **DIAL** knob to change the frequency step.
- 2. Press the PTT switch to save the setting and return to normal operation.

In the default setting, of the frequency step is set to "**AUTO**", which automatically provides a suitable frequency step according to the frequency band.


### Selecting the Communication Mode

### Using AMS (Automatic Mode Select) function

The **FT-70DR/DE** transceiver is equipped with the AMS (Automatic Mode Select) function which automatically selects the communication mode corresponding to the received signal.

1. Press and hold the [AMS] key to turn the AMS function **ON** or **OFF**.

When the AMS function is turned OFF, the communication mode must be selected manually. See "(**Fixing the Communication Mode**)".



The selected communication mode is displayed under the AMS icon.



- The default setting is "**ON**" in the AMS function.
- AMS function may only be turned **ON** when operating within the 144 MHz and 430 MHz Amateur Bands

### ${\ensuremath{\bullet}}$ Setting the transmission mode when using the AMS function

The AMS function will automatically set the receiver to the mode of the received signal, but the transmission mode may be fixed regardless of the received mode.

1. Press the [AMS] key.

í

2. Rotate the **DIAL** knob to tune to the desired transmission mode as follows.

Transmit Mode	Receive and Transmit	
TX AUT (TX AUTO)	Receive: Automatically selects the communication mode of transmission according to the signal being received. Transmit: Transmits automatically in the communication mode selected by the AMS function, or in the mode selected manually by pressing the [MODE] key.	
TX FM	Receive: Automatically selects the communication mode of transmis- sion according to the signal being received. Transmit: Always transmits in the analog FM mode.	
TX DIG (TX DIGITAL)	Receive: Automatically selects the communication mode of transmission according to the signal being received. Transmit: Always transmits in the DN mode.	

3. Press the **[AMS]** key or the **PTT** switch to save the setting and return to normal operation.

i

When the AMS function is **ON**, press the [**MODE**] key to change the communication mode temporarily.

### **Fixing the Communication Mode**

- To fix the transmit operation mode, press and hold the [AMS] key to turn the AMS function OFF. The "AMS" icon turns off.
- 2. Press the [MODE] key to change the communication mode.



urrent Communication Mode

Communication Mode	lcon	Description of Modes
V/D Mode (Voice/Data simultaneous transmission mode)	DN	This is the standard digital mode. Calls are less prone to interruptions caused by detection and correction of the received digital voice signal.
Voice FR Mode <sup>*1</sup> (Voice Full Rate Mode)	<b>VW</b> *1	High speed data communication using entire 12.5 kHz band. Enables high-quality voice communication.
FM Mode	FM	Analog communication using FM mode.
AM Mode (receive only) <sup>*2</sup>	<i>F</i> i <i>M</i>	The AM mode for receive only.

\*1 When the Set Mode [16 DIG VW] (C 32) is set to "ON" (factory default is "OFF"), the Voice FR mode (VW) may be selected. \*2 When the Set Mode [47 RX MOD] (C 33) is set to "AUTO" (factory default setting), AM mode is automatically selected within

\*2 When the Set Mode [47 RX MOD] (L] 33) is set to "AUTO" (factory default setting), AM mode is automatically selected within the AIR band (108 - 136.995 MHz).

### Transmission


1. While pressing and holding the **PTT** switch, speak into the microphone.

The MODE/STATUS Indicator lights during the transmission.

Transmission mode	Left portion	Right portion
Analog FM	Ded	Red
Digital C4FM mode	Red	Blue



If the **PTT** switch is pressed when a frequency other than the amateur ham radio band is selected, an alarm tone (beep) will be emitted and "**ERROR**" appears on the LCD, disabling transmission.



 Release the PTT switch to return to receive mode. When receiving a signal, the MODE/STATUS Indicator lights according to the receive mode.


Receive mode	Left portion	Right portion
Analog FM	Croon	Green
Digital C4FM mode	Green	Blue

If transmission is continued for a long period, the transceiver overheats and the high temperature protection function is activated. As a result, the transmitting power level is automatically set to Low Power. If transmission continues while the high temperature protection function is active, the transceiver will be forcibly returned to the receive mode.

## **Changing the Transmission Power Level**

- Press the [F] key, then press the [1](TX PO) key.
- Rotate the DIAL knob to select one of the following transmission power levels.

TX PO Level	lcon	PO meter
HIGH (5 W)*	(off)	
MID (2 W)	LOW	
LOW (0.5 W)	LOW	



\*The default setting.

3. Press the **PTT** switch to save the setting and return to the normal operation.




í

The transmission power level may be set separately for each frequency band.

### Locking Keys and DIAL knob

 Press the [POWER] (LOCK) switch, "LOCK" is displayed on the LCD for one second, the "a" icon appears on the LCD, and then the keys and DIAL knob are locked.



- The keys, the **DIAL** knob, and the **PTT** switch may be selected to be locked using Set Mode [30 LOCK] ([] 32).
- The default setting is the [K+D] (the keys and the DIAL knob are locked).
- The [MONI/T-CALL] switch and the VOL switch cannot be locked.
- 2. Press the [**POWER**] (LOCK) switch again, "UNLOCK" will be displayed on the LCD and keys and the **DIAL** knob are unlocked.

### Programmable key function

The [7] (P1) and or the [8] (P2) keys are user programmable, allowing quick access to the Set Modes that are used most often.

- Assigning Set Mode Items to the Programmable Keys
- 1. Press and hold the [F] key, and then rotate the **DIAL** knob to select the desired Set Mode item.
- 2. Press and hold the [7](P1) key or the [8](P2) key.

"P1KEY" or "P2KEY" appears on the LCD and return to the Set Mode.

- 3. Press the **PTT** switch to return to the normal operation.
- Recalling the assigned Set Mode item
- 1. Press the  $[{\bf F}]$  key and then press the  $[{\bf 7}]({\bf P1})$  key or  $[{\bf 8}]({\bf P2})$  key.

The assigned Set Mode item appears on the LCD.

The [7] (P1) is [12 DC VOLT] and [8] (P2) key is [47 RX MOD] as a default assignment.

ť

# Using the convenient Digital C4FM feature

### About the Digital Group ID (DG-ID) feature

1. Digital Group ID (DG-ID) function allows communications with only the specific group members using the two-digit ID numbers. The desired DG-ID number from 00 to 99 is set in advance by all the group members. This ID number may be set separately for transmit and receive, when the same ID number is set for both transmit and receive, only group members with the same ID number will be heard. This feature may be used to communicate only with group members that have the same DG-ID number. The GM function may also be utilized to automatically monitor whether or not group member stations with the same DG-ID number are operating within communication range.

The DG-ID number 00 detects signals with all ID numbers. Normally setting the ID number to "00" for both transmit and receive will permit reception of the signals from all other stations using the digital C4FM mode, regardless of the transmit DG-ID number settings of the other stations.

Also note that when the receive DG-ID number of your transceiver is set to a DG-ID number other than "00", received signals that do not have the same DG-ID number may not be heard.

 When accessing the C4FM digital repeater controlled by the DG-ID number, set the transmit DG-ID number of the FT-70DR/DE to that of the repeater input. Even in that case, if the receive DG-ID number of the FT-70DR/DE is set to "00", all the downlink signals from the repeater may be received.

### Communicating with the DG-ID feature

- Digital C4FM mode transceivers compatible with the DG-ID function are required in order to utilize this function.
- If the firmware is not compatible with the DG-ID function, update the latest firmware to use the DG-ID function. The latest firmware is available on the YAESU website.

# Setting the transmit and receive DG-ID number to "00" for communicating with all other stations using C4FM digital mode

1. Press and hold the [MODE] key.

í

- The DG-ID number setting screen appears and the transmit DG-ID number "T00" blinks.
- If the transmit DG-ID number is not set to "T00", rotate the DIAL knob to set "T00".
- Press to the [MODE] key again and the receive DG-ID number "R00" will blink.
   If the receive DG-ID number is not set "R00", rotate the DIAL knob to set "R00".

3. Press and hold the **[MODE]** key, or press the **PTT** switch to save the setting and return to the normal operation.

The setting is complete.



- 4. To check whether or not other stations are operating within communications range, press the **[GM]** key to turn the GM (Group Monitor) function ON.
  - The other stations also need to turn the GM (Group Monitor) function ON.
  - While operating with the GM (Group Monitor) function, "Operating Frequency", "GROUP" and "DG-ID number" are shown repeatedly on the LCD.
- 5. Press the [GM] key to turn the GM (Group Monitor) function OFF and return to the normal operation.
  - While setting the DG-ID number, pressing and holding the [HM/RV] key will set the transmit and the receive DG-ID numbers to "00".



- If the receive DG-ID is set to a number other than "00", only signals with that DG-ID will be received. Normally, set the receive DG-ID number to "00" except when communication is desired only with group members.
- The transmit and receive DG-ID default number is set to "00".

#### Communicating only with the specific members by setting the DG-ID number except for "00"

- Example Set the DG-ID number of to "50"
- 1. Press and hold the [MODE] key.
  - The DG-ID number setting screen appears and the transmit DG-ID number "T00" blinks.
  - Rotate the DIAL knob to set the transmit DG-ID number to "T50".
- 2. Press to the [**MODE**] key again to blink the receive DG-ID number "R00".

Rotate the **DIAL** knob to set the reception DG-ID number to "R50".










3. Press and hold the [MODE] key or press the PTT switch to save the setting and return to normal operation.

Tuning to the same frequency and setting the same DG-ID for all the group members will enable communication between the members and exclude other signals.

- 4. Press the [**GM**] key to turn the GM (Group Monitor) function ON and check whether or not other stations that are operating on frequency, with the GM (Group Monitor) function ON, and have the same GD-ID number setting, are in the communication range.
  - The other stations also need to turn the GM (Group Monitor) function ON.
  - During operating on the GM (Group Monitor) function, "Operating Frequency", "GROUP" and "DG-ID number" are shown repeatedly on the LCD.
- 5. Press the [GM] key to turn the GM (Group Monitor) function OFF and return to the normal operation.
  - While setting the DG-ID number, pressing and holding the [HM/RV] key will set the transmit and the receive DG-ID numbers to "00".
  - If the receive DG-ID is set to a number other than "00", only signals with that DG-ID will be received. Normally, set the receive DG-ID number to "00" except when communication is desired only with group members.

í

For example, if the transmit and receive DG-ID numbers of group members are all set to "50", communications from other DG-ID numbers is not received and only the group members setting the same DG-ID numbers may communicate. Also, the other stations set the receive DG-ID to any number except for "00" may not be received the signals of your stations.

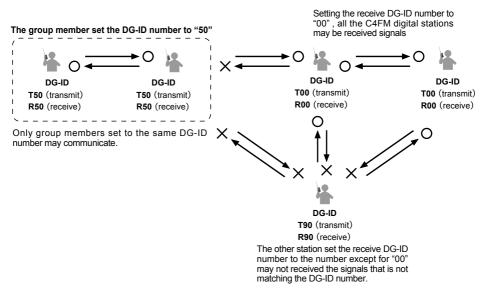

### About the GM(Group Monitor) feature

i

The GM (Group Monitor) function automatically checks to find if there are any stations with the GM function in operation with the same DG-ID number within communication range. Setting the receive DG-ID number to "00" will check for all the C4FM digital stations In/Out of range.

 Activating the GM (Group Monitor) function, the Digital C4FM mode is changed. For communicating in the Analog FM mode, Set the GM function OFF.




• The other member stations must also turn the GM (Group Monitor) function ON.

When the GM (Group Monitor) is activated, the following information screens are automatically switched.

#### **GM** information screen

i



\*1 : Memory tag display is displayed in the case of the memory channel or the home channel setting the memory tag.

#### • In / Out Display

- When another station with the same DG-ID number is within the communication range, a beep sounds and the "In" is displayed under the GM (GroupMonitor) function icon, and the right side of the **MODE/STATUS** indicator lights in light blue.
- When all the members are out of the communication range, "out" is displayed and the **MODE/STATUS** indicator light is off.
- When a signal from another member station is received, the call sign of the other station is displayed on the LCD for about 10 seconds.




í

When the DG-ID transmit and receive are set to "00" in the factory default setting, all stations In/ Out of range may be received and are displayed, but the other stations that set their receive DG-ID number to other than "00" may not be receiving your signals.

#### Displaying the information of the other station received by GM (Group Monitor) function

- 1. When receiving the signals with the same DG-ID number, press the [MODE] key to reveal the other station information:
  - Depending on the model, the information such as the call sign of the other station, latitude, longitude and so on may be displayed.
  - When receiving the signals of multiple stations, press the [MODE] key to display the call sign of the other station, and then rotate the DIAL knob to select the other stations to be displayed on the LCD.
  - Up to 24 stations may be displayed in order of their reception.
    - The FT-70DR/DE may not send its own location information because the FT-70DR/DE is not equipped with the GPS function.
    - The position information is displayed only when the latitude and longitude information is included in the signal of the other station.
    - The transceivers that may transmit position information with the GM function are as follows: (As of June 2017).
       FTM-400XD / FTM-400D series, FTM-100D series, FT2D, FT1XD, FT1D, FT-991A / FT-991\*
       (\*: Latitude and longitude setting must be entered manually, or an external GPS device must be connected.).

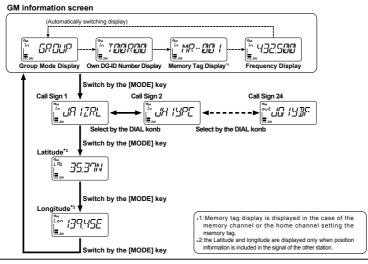

i

When the callsign or latitude/longitude is being displayed, the displayed station is given priority. So even when another station is received the display is not changed. While using the callsign display screen, rotate the **DIAL** knob to select another station display.

### **Communicating Via the Repeater**

The transceiver includes an ARS (Automatic Repeater Shift) function which sets the repeater operation automatically when the receiver is tuned to the repeater frequency.

- 1. Set the downlink (output) frequency from the repeater.
- 2. "■", "■"or "**T**" lcons may automatically appear above the frequency.
- 3. Speak into the microphone while pressing and holding the **PTT** switch.
- The reverse state

i

The "reverse" state temporarily reverses the transmit and receive frequencies. This allows checking to find if direct communication with the other station is possible.

- 1. When the ARS in ON, press the [HM/RV] key.
  - The transmit and receive frequencies are temporarily reversed ("reverse" state).
  - In the "reverse" state, the "∎" or "∎" blinks on the LCD.
- 2. Press the [HM/RV] key to exit from the "reverse" state.



Set Mode [46 RPT.FRQ]: Allows changing the repeater shift offset.

- [F] key  $\rightarrow$  [0] (RPT) key: Allows setting the repeater shift direction.
- [F] key  $\rightarrow$  [6] (CODE) key: Allows setting the tone encoder frequency.
- The ARS function may be set to OFF in the Set Mode [45 RPT.ARS].

The Yaesu DR-2X/XE repeater incorporates the DG-ID feature, which may limit access to the repeater by using a two-digit 01 to 99 ID number. Multiple DR-2X/XE repeaters, connected via the Internet may also be managed using the DG-ID numbers. To access a specified DR-2X/XE repeater, or DR-2X/XE repeater group, that requires a DG-ID, the FT-70DR/DE transmit DG-ID must be set/programmed accordingly. Also, when communicating via a DR-2X/XE repeater, set the receive DG-ID number to "00".


### Tone Calling (1750 Hz burst tone)

If your transceiver is FT-70DE (European version), press and hold in the **MONI/T-CALL** switch to generates the 1750 Hz burst tone to access the European repeater.

The transmitter will automatically be activated, and the 1750 Hz audio tone will be superimposed on the carrier. Once the repeater has been accessed, release the **MONI/T-CALL** switch, and use the **PTT** switch to activate the transmitter thereafter.

If needed, the FT-70DR (USA/Asian version), may be set to access repeaters which require a 1750 Hz burst tone by setting the **MONI/T-CALL** switch to serve as a "Tone Call" switch instead. To change the configuration of the **MONI/T-CALL** switch, use Set Mode [32 M/T-CL].





# Using the Memory

The FT-70DR/DE transceiver incorporates Large-capacity memory channels that can register the operating frequency, communication mode, and other operational information.


- 900 Memory Channels
- 90 Skip Search Memory Channels
- 6 Home Channels
- 50 pairs PMS Memory Channels

Each memory channel can store the following information. Communication mode

- Operating frequency
- TX output power
- Memory tag
- Frequency steps Repeater information
- DCS information
- Tone information

- ATT information
- S-Meter squelch level 
   Skip memory information 
   Specified memory channel information

Memory channels can be sorted and registered into memory banks according to the desired use. The transceiver allows using 24 different memory banks. A maximum of 100 memory channels can be registered in each memory bank. One memory channel can be registered to several memory banks. One memory channel in one memory bank can be recalled, and the memory channels in the several memory banks can be scanned.

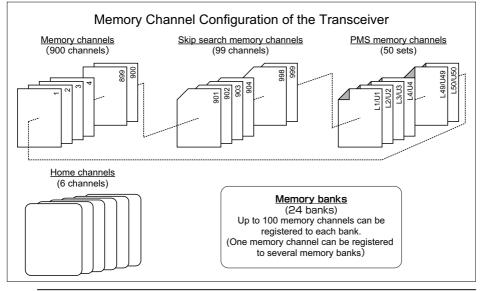

For additional details on the Skip Search Memory, PMS memory channel and Memory Bank, refer to the Advanced Manual which may be downloaded from the Yaesu website.

#### CAUTIONS!

The information registered to memory channels can be corrupted by incorrect operation, static electricity, or electrical noise. Also, it can be erased in the event of a failure or repair. Be sure to keep a record of the settings on paper.


# **Registering to Memory Channels**

- 1. Set the frequency and the communication mode to be registered to a memory channel.
- Press the [V/M] key.
   "
   <sup>m</sup> blinks on the LCD.
- 3. Rotate the **DIAL** knob to select the desired channel number.

The channel numbers that do not contain memory data will blink on the LCD.

- 4. Press the [V/M] key.
  - If you attempt to register a frequency to a memory channel that already contains frequency data, "M-WRT?" will appear on the LCD. Press the [V/M] key to overwrite the memory channel.
  - The memory tag input screen will be displayed on the LCD.
- 5. Input the memory tag.
  - Use the numeric keys or the **DIAL** knob to input the characters.





- Example: Rotating the DIAL knob to display the following characters.
   ↔ A Z ↔ (symbol) ↔ 0 9 ↔ (symbol) ↔ A Z ↔
- Example: Press the [2] key repeatedly to toggle among the following available characters.  $A \to B \to C \to 2 \to A \cdots$
- Moving the cursor and deleting the input characters
   [BAND] key: Moves the cursor to the right
  - [MODE] key: Moves the cursor to the left

[GM] key (press and hold): Erases all characters after the cursor

6. Press and hold the [V/M] key.

The beep sounds and the memory is saved.

### **Recalling a Memory Channel**

1. Press the [V/M] key.

İ

The memory channel most recently used appears on the LCD.

- 2. Rotate the **DIAL** knob to select the desired memory channel, or input the 3 digits of the memory channel using the numeric keys to recall the memory channel directly.
- 3. Press the [V/M] key to exit the memory mode, and return to the normal operation.
  - The data registered to a memory channel can be transferred to the VFO operating band by following the procedure below:

Press and hold the [V/M] key  $\rightarrow$  Rotate the DIAL knob to select the channel  $\rightarrow$  Press and hold the [GM] key  $\rightarrow$  "V-WRT?" appears  $\rightarrow$  Press the [GM] key.

- Pressing the [F] key and then rotating the **DIAL** knob allows skipping memory channels quickly in steps of 10 memory channels.
  - The transceiver may be placed into a Memory Channel Only mode, (which restricts the FT-70DR/DE to operate only on the memory channels), by pressing the [V/M] key, while pressing the Power (Lock) switch to turn the transceiver ON. To cancel the Memory Channel Only mode, turn the transceiver OFF, then press the [V/M] key again, while pressing Power (Lock) switch to turn the transceiver ON.

### **Clearing Memories**

- 1. Press the [V/M] key to enter the memory mode.
- 2. Press and hold the [V/M] key.
- 3. Rotate the **DIAL** knob to select the memory channel from which the data is to be cleared.
- 4. Press the [AMS] key.

i

İ

- Confirmation screen "M-MSK?" is displayed and then press the [AMS] key again to clear the memory channel.
  - Data on memory channel One, and the Home channel may not be cleared.
  - The cleared memory can be restored using the following steps.
  - Press the [V/M] key to enter the memory mode  $\rightarrow$  Press and hold the [V/M] key  $\rightarrow$  Rotate the DIAL knob to restore the channel  $\rightarrow$  Press the [AMS] key

# **Recalling the Home Channels**

 Press the [F] key, and then press the [HM/RV] key.

"H" and the home channel frequency of the currently selected band appears on the LCD.

 Press the [F] key, and then press the [HM/RV] key or the [V/M] key to return to the previous frequency.

While recalling the home channel, rotate the **DIAL** knob to transfer the home channel frequency to the VFO operating band. The home channel frequency can be set not to be transferred in the Set Mode **[27 HM-VFO]** ([]32).

# Changing the Home Channel Frequency

- 1. Set the frequency and the operating mode you want to store as a home channel.
- 2. Press and hold the [HM/RV] key.

The beep sounds and the home channel frequency is changed.



For additional details on the following functions, refer to the Advanced Manual which may be downloaded from the Yaesu website.

# Split Memory

Two different frequencies, one for receive and another for transmit, can be registered to a memory channel.

# **Using Memory Tag**

Memory name tags may be assigned to the memory channels and home channels.

### Using Memory Bank

The transceiver allows using up to 24 memory banks to allow sorting and registering the channels in convenient groups.





The transceiver supports the following four scanning functions:

- · VFO Scan
- Memory Channel Scan
- Programmable Memory Scan(PMS)
- Memory Bank Scan
- Weather Alert Scan

For additional details on the Programmable Memory Scan (PMS) and Memory Bank Scan, refer to the Advanced Manual which may be downloaded from the Yaesu website.

### VFO Scan

VFO scan function scans the frequencies, and detects signals.

- 1. Press the [V/M] key to enter the VFO mode.
- 2. Press the [F] key and then press the [2](SCAN) key.
  - Scanning starts toward higher frequencies.
  - If the **DIAL** knob is rotated while scanning is in progress, the scanning will continue up or down in frequency according to the direction of the **DIAL** Knob rotation.



- If the scanner halts on an incoming signal, the back light will turn ON and the decimal point between the "MHz" and "kHz" digits of the frequency display will blink. Scanning will resume in about five seconds.
- 3. Press the PTT switch to cancel the scanning.
  - If the scan has paused on a signal, rotating the DIAL knob will cause scanning to resume instantly.
  - The manner in which the scanner resumes after it has paused on a signal may be selected within approx. 0.1 sec 10 sec by using the Set Mode [53 SCN.STR] ([]]33).
  - When turning the transceiver **OFF** while scanning, turning the transceiver ON, will cause scanning to resume.
  - To set the transceiver action when scanning stops, see "Setting the Receive Operation When Scanning Stops" on page ([]]33).
  - The following Set Modes allow scanning only the frequencies within the set band frequency range. The Set Mode [49 SCM.WTH] the frequency range on memory scanning (□33). The Set Mode [50 SCV.WTH] the frequency range on VFO scanning (□33).

### Memory Channel Scanning

The receiver may be set to scan memory channels:

- 1. Recall a memory channel to begin memory scanning.
- 2. Press the [F] key and then press the [2](SCAN) key.
  - Scanning starts toward higher memory channel numbers.
  - If the **DIAL** knob is rotated while scanning is in progress, the scanning will continue up or down in frequency according to the direction of the **DIAL** Knob rotation.
  - If the scanner halts on an incoming signal, the back light will turn ON and the decimal point between the "MHz" and "kHz" digits of the frequency display will blink. Scanning will resume in about five seconds.
- 3. Press the **PTT** switch to cancel the scanning.



i

If the scan has paused on a signal, rotating the **DIAL** knob will cause scanning to resume next memory channel.

### Setting the Receive Operation When Scanning Stops

- 1. Press and hold the [F] key to enter the Set Mode.
- 2. Rotate the DIAL knob to select the Set Mode [52 SCN.RSM].
- 3. Press the [F] key.
- 4. Rotate the **DIAL** knob to select the operation performed after the scan stops:
  - 2.0 S 10.0 S

The signal is received for a specified period of time, and then scanning resumes. The scan resume time may be set from 2 to 10 seconds at 0.5 second intervals.

• BUSY

The signal is received until the signal fades out. Two seconds after the signal fades out, scanning resumes.

• HOLD

Scanning stops and tuning remains on the current receive frequency (Scanning does not resume).

- 5. Press the **PTT** switch to save the new setting and exit to normal operation.
  - The above setting (Set Mode [52 SCN.RSM] ([]33)) is common for all scanning operation.



• The time interval to resuming scanning after a received signal ends during scanning may be set between approx. 0.1 SEC to 10 SEC (the factory default is set to 2.0 SEC.) in the Set Mode [53 SCN.STR] ([] 33).

### Weather Alert Scan

This feature allows you to check the Weather Broadcast Memory Channels for the presence of the NOAA Alert Tone while operating using VFO scan or Memory channel scan. When the Weather Alert Scan feature is engaged, the **FT-70DR/DE** will check the Weather Broadcast Channels for activity every five seconds while scanning. If you watch the display carefully, you'll observe the scanner periodically shifting to the Weather Broadcast channel, scanning the Weather channels quickly in search of the Alert Tone, after which regular scanning will resume for another five seconds.

- 1. Press and hold the **[F]** key to enter the Set Mode.
- 2. Rotate the DIAL knob to select the Set Mode [61 WX ALT] ([]33).
- 3. Press the [F] key and then rotate the DIAL knob to select "ON".
- 4. Press the **PTT** switch to save the setting and return to normal operation.
- 5. Press the [F] key and then press the [2](SCAN) key to start scanning.
  - Scanning starts searching upwards in frequency.
  - The display will remain on the VFO frequency, but every five seconds the transceiver will scan the Weather Broadcast Channels for activity.



- 6. While scanning the Weather channels, press the **PTT** switch and then press the **PTT** switch again.
  - Scanning starts within the Weather Broadcast Channels.
  - While scanning the Weather channels, press the **PTT** switch and then rotate the **DIAL** knob to select the desired Weather Broadcast Channel.
- 7. Press the [V/M] key return to normal operation.

СН	Frequency
A1	162.550 MHz
A2	162.400 MHz
A3	162.475 MHz
A4	162.425 MHz
A5	162.450 MHz
A6	162.500 MHz
A7	162.525 MHz
A8	161.650 MHz
A9	161.775 MHz
A10	163.275 MHz

For additional details on the following functions, refer to the Advanced Manual which may be downloaded from the Yaesu website.

### Skip Memory Channel and Specified Memory Channel

Two types of memory channels may be designated, "skip memory channels" and "specified memory channels" for effective memory channel scanning.

Skip memory channels: Permits designating undesired channels to be skipped during scanning. Alternatively, you can specify that only designated memory channels are scanned during memory scanning.

### Programmable Memory scan (PMS)

This function scans only the range of frequencies between the lower and upper limits registered in a pair of PMS Programmable Memory channels. 50 sets of PMS memory channels (L1/U1 to L50/U50) are available.

#### **Dual Receive (DW) feature**

The transceiver checks for signals on the frequency registered to the selected memory channel (Priority Memory Channel) once approximately every 5 seconds.

# **Convenient Functions**

(

For additional details on the following functions, refer to the Advanced Manual which may be downloaded from the Yaesu website.

### **Tone squeich feature**

The tone squelch opens the speaker audio only when a signal containing the specified CTCSS tone is received. By matching the tone frequency with the partner station in advance, a quiet standby is possible.

### Digital Code squelch (DCS) feature

DCS (Digital Coded Squelch) function that allows audio to be heard only when signals containing the same DCS code are received.

### New PAGER (EPCS) feature

This new feature allows calling specified stations only, by using a pager code that combines two CTCSS tones. Even when the person who is called is not near the transceiver, the information is displayed on the LCD indicating that a call was received. When the call is received, the bell sounds. The transceiver is automatically placed in transmit mode (for about 2.5 seconds) when called by the other party, and notifies the other party that you are ready to communicate.

### Digital Personal ID (DP-ID) feature

Digital Personal ID (DP-ID) feature opens the speaker audio only when a signal set to the same DP-ID in the Digital Mode is received.

# **Using Set Mode**

The Set Mode permits configuring the various functions according to individual operating needs and preferences.

- Press and hold the [F] key. The previously selected Set Mode item is displayed.
- 2. Rotate the **DIAL** knob to select the desired Set Mode item.
- 3. Press the [F] key and then rotate the **DIAL** knob to change the setting.
- 4. Press the **PTT** switch to save the settings and return to normal operation.

On some setting screens, pressing the **PTT** switch does not exit from Set mode. In this case, press and hold the [**F**] key to return to the frequency display screen.



In step 4 above, press the [F] key to save the new setting and return to Set Mode item to set the other Set Mode.
On some setting screens, key operation is different than described in the above steps (For example, inputting the characters, etc.). Refer to the Advance manual.

For additional details, refer to the Advanced Manual which may be downloaded from the Yaesu website.

### Display and Key Lamp Dimmer

The illumination level of the display and keys may be adjusted from the six levels.

### Changing the Beep Volume

İ

The volume of the key operation beep sound may be adjusted.

When rotating the DIAL knob to adjust the beep sound, the beeps will be heard. Adjust the sound to the desired level.

### Automatic Power OFF (APO)

This function helps to prevent the battery draining by turning the transceiver OFF automatically if there is no operation for a certain period of time.

### **Time Out Timer (TOT)**

Set the transceiver to automatically return to receive mode after transmitting continuously for a certain period of time. The TOT function limits inadvertent transmission of unnecessary signals, and unwanted battery power consumption.

### **Busy Channel Lock-Out (BCLO)**

The BCLO feature prevents transmitting while a received signal strong enough to open the "noise" squelch is present (Set Mode **[3 BCLO]** []32)

### **Receiver Battery Save Function**

Sets the Receive OFF Battery save interval (sleep ratio) to reduce power consumption.

#### **Password Feature**

A 4-digit password may be set to prevent unauthorized operation of the transceiver without permission. Once a password is set, the transceiver cannot be used unless the valid password is entered.

## Tables of Set Mode Operations

No.	Set Mode item	Description	Selectable options (Options in bold are the default settings)
1	ANT.ATT	Switch the attenuator between ON/OFF.	OFF / ON
2	APO	Set the length of time until the transceiver turns off automatically.	OFF / 0.5 Hours to 12 Hours
3	BCLO	Turns the busy channel lockout function on/off.	OFF / ON
4	BEEP	Sets the beep sound function.	OFF / KEY+SC / KEY
5	BEP.LVL	Beep volume setting	LEVEL1 – <b>LEVEL4</b> – LEVEL7
6	BEP.EDG	Sets the beep sound ON or OFF when a band edge is encountered.	OFF / ON
7	BEP.STB	Sets the beep sound ON or OFF when the other station completes transmission in the Digital Mode.	
8	BELL	Set the bell function settings.	OFF / 1 T–20 T / CONT (Continuous ringing)
9	BNK.NAM	Assign a name to each memory bank.	(up to 6 characters)
10	BSY.LED	Turn the MODE/STATUS Indicator ON or OFF while receiving signals.	LED.OFF / <b>LED.ON</b>
11	CLK.SFT	Set the clock shift function.	А/В
12	DC VLT	Display the voltage.	(Voltage)
13	DCS.INV	Select a combination of DCS inversion codes in terms of communication direction.	<b>RXN.TXN</b> / RXR.TXN / RXB.TXN / RXN. TXR / RXR.TXR / RXB.TXR
14	DIMMER	Set the brightness level of the LCD backlight and numeric keypad light.	LEVEL1 – <b>LEVEL6</b>
15	DIG.POP	Set the POP UP display time.	OFF / 2 SEC – 10 SEC – 60 SEC / CONT
16	DIG VW	Turn the VW mode selection ON or OFF.	ON/OFF
17	DP-ID	DP-ID list (Display/Register/Clear)	(Registered DP-ID)
18	DT DLY	Set the DTMF code transmission delay time.	50MS / 250MS / <b>450MS</b> / 750MS / 1000MS
19	DT SET	Select and edit the DTMF auto dialer memory channel.	CH0 / <b>CH1</b> – CH9
20	DT SPD	Set the DTMF code transmission speed.	50 MS / 100 MS
21	DW INT	Set the priority memory channel monitor- ing interval during Dual Receive.	0.1 S – <b>5.0 S</b> – 10.0 S
22	DW RSM	Configure the scan stop mode settings for Dual Receive.	2.0 S – 10.0 S / BUSY / <b>HOLD</b>
23	DW RVT	Turn the "Priority Channel Revert" feature ON or OFF during Dual Receive.	OFF / ON
24	GM RNG	Select the beep option while receiving digital GM information.	OFF / <b>IN RNG</b> /ALWAYS
25	GM INT	Set the transmission interval of digital GM information.	OFF / NORMAL / LONG
26	HM/RV	Select the function of the [HOME/REV] key.	HOME / REV
27	HM-VFO	Turn transfer VFO to the Home channel ON or OFF.	OFF / <b>ON</b>
28	LAMP	Set the duration time of the backlight and keys to be lit.	OFF / 2 SEC – <b>5 SEC</b> – 10 SEC / CONT
29	LED.LGT	Turn ON the LED light.	(LED lights up)
30	LOCK	Configure the lock mode setting.	KEY / DIAL / <b>K+D</b> / PTT / K+P / D+P / ALL

No.	Set Mode item	Description	Selectable options (Options in bold are the default settings)
31	MCGAIN	Adjust the microphone gain level.	LEVEL1 – LEVEL5 – LEVEL9
32	M/T-CL	Select the function of the [MONI/T-CALL] switch.	<b>MONI</b> / T-CALL* (*: Eurpean / Asian Version)
33	MEM.NAM	Input the memory channel tag.	(Up to 6 letters)
34	MW MOD	Set the automatic channel number incre- ment when registering to a memory chan- nel.	LOWER / NEXT
35	NM/FRQ	Select the memory channel tag display or frequency display	FREQ / ALPHA
36	OPN.MSG	Select the Opening Message that appears when the transceiver is ON.	OFF / <b>MSG</b> / DC
37	PAG.ABK	Turn the pager answer back Function ON/OFF	OFF / ON
38	PAG.CDR	Specify a personal code (receive).	01 – <b>05</b> – 50, 01 – <b>47</b> – 50
39	PAG.CDT	Specify a personal code (transmit).	01 – <b>05</b> – 50, 01 – <b>47</b> – 50
40	PASSWD	Turn the password function ON or OFF.	OFF / ON
41	PSWDWT	Input the password.	(four digits)
42	PTT.DLY	Set the PTT delay time.	OFF / 20 MS / 50 MS / 100 MS / 200 MS
43	RAD ID	Display the transceiver specific number (5 digits alphanumeric ID). (Uneditable)	(Radio ID display)
44	RF SQL	Adjusts the RF Squelch threshold level.	<b>OFF</b> / S1 – S9
45	RPT.ARS	Turn the ARS function on/off.	OFF / ON
46	RPT.FRQ	Set the repeater shift width.	0.00M – 150.00M
47	RX MOD	Select the receive mode.	AUTO / FM / AM
48	RX SAVE	Set the battery save time.	OFF / <b>0.2 S</b> – 60.0 S
49	SCM.WTH	Set the memory scan frequency range.	ALL / BAND
50	SCV.WTH	Set the VFO scan frequency range.	ALL / BAND
51	SCN.LMP	Set the scan lamp ON or OFF when scanning stops.	OFF / <b>ON</b>
52	SCN.RSM	Configure the scan stop mode settings.	2.0 S – <b>5.0 S</b> – 10.0 S / BUSY / HOLD
53	SCN.STR	Set the scanning restart time.	0.1 S – <b>2.0 S</b> – 10.0 S
54	SQL.EXP	Set a squelch type separately for Receive and transmit.	SPL.OFF / SPL.ON
55	TEMP	Indicates the current temperature inside the transceiver	(temperature display)
56	тот	Set the timeout timer.	OFF / 0.5M – <b>3.0M</b> – 10.0 M
57	TS MUT	Turn the muting function on/off during tone search.	OFF / <b>ON</b>
58	TS SPD	Select a tone search speed.	FAST / SLOW
59	VER.INF	Display the CPU and DSP firmware ver- sion of the transceiver.	(C x.xx) / (D x.xx) *Rotate DIAL knob to select
60	VFO.MOD	Set the frequency setting range in the VFO mode by <b>DIAL</b> knob.	ALL / BAND
61	WX ALT	Turn the weather alert scan on/off.	OFF / ON
62	W/N.DEV	Set the Transmit Modulation Level in the FM mode.	WIDE / NARROW
63	MYCALL	Set the call sign.	(up to 10 characters)

#### All Reset

To restore all transceiver settings and memory content to the factory defaults.


#### CAUTION!

Resetting the transceiver will clear all memories. Please make a note of the memories (memory channel settings, etc) before resetting.

- 1. Turn the transceiver OFF.
- Press and hold the [MODE] key, the [HM/RV] key and the [AMS] key and turn the transceiver ON simultaneously.

The beep sounds and the confirmation screen is displayed.

- 3. Press the [F] key.
  - The beep will sound, and the transceiver will reset all factory defaults.
  - After resetting all defaults, the call sign input message appears on the LCD. Set the call sign ( 
    14).





To cancel the resetting, press any key except the [F] key.


#### Set Mode Reset

All the Set mode only, settings can be restored to the default settings.

- 1. Turn the transceiver OFF.
- Press the [MODE] key and the [V/M] key and turn the transceiver ON simultaneously. The beep sounds and the confirmation

screen is displayed.

Press the [F] key then the beep sounds and all Set mode settings are reset to defaults.



Perform All Reset to restore all of the following Set Mode items to default.



11 CLK.SFT 1 ANT.ATT 8 BELL 9 BNK.NAM 13 DCS.INV 19 DT SET 33 MEM.NAM 35 NM/FRQ 36 OPN.MSG 37 PAG.ABK 38 PAG CDR 39 PAG.CDT 41 PSWDWT 44 RF SQL 46 RPT.FRQ 47 RX MOD 49 SCM.WTH 50 SCV.WTH 54 SQL.EXP 62 W/N.DEV 63 MYCALL



To cancel the resetting, press any key except the [F] key.

General				
Frequency Range :	RX	108-137 MHz		
		137-174 MHz		
		174-222 MHz		
		222-420 MHz		
		420-470 MHz		
		470-580 MHz		
	ТΧ	144-148 MHz, 430-450 MHz (USA version)		
		144-146 MHz, 430-440 MHz (European version)		
		140-174 MHz, 420-470 MHz (Asian version)		
		(amateur band only)		
Channel Steps:	5/6.25/(	8.33)/10/12.5/15/20/25/50/100 kHz ()Air Band		
Mode of Emission:	,	BE, F7W		
Frequency Stability:		n (−20 °C to +60 °C [−4 °F to +140 °F])		
Antenna Impedance:	50Ω			
Supply Voltage:		<ul> <li>7.4 V DC, Negative Ground SBR-24LI,</li> <li>ng: 6.0 - 14 V DC, Negative Ground (Battery Connect)</li> <li>11 - 16 V DC, Negative Ground (EXT DC JACK, Charging)</li> </ul>		
Current		(Receive VOL Level 16)		
Consumption(Approx.):	120 mA(Standby, Saver Off) 70 mA(Standby, Saver 1 : 5 On)			
		(POWER OFF (APO))		
	1.6 A(	5 W TX, 144 MHz 7.4 V DC)		
		5 W TX, 430 MHz 7.4 V DC)		
Operating Temperatures		(Auto Power Off)		
Operating Temperature: Case Size (W × H × D):		to +60 °C (−4 °F to +140 °F) 33 mm (2.36″ × 3.86″ × 1.30″)		
		h SBR-24LI, w/o knob, antenna & belt clip)		
		31 mm (2.36" × 3.86" × 1.22")		
		o SBR-24LI, knob, antenna & belt clip)		
Weight (Approx.):	255 g (8	3.99 oz) (with SBR-24LI & Antenna)		
<ul> <li>Transmitter</li> </ul>				
Output Power:	5.0 W (	High) / 2.0 W (Middle) / 0.5 W (Low) (@ 13.8 V or SBR-24LI)		
Modulation Type:	,	BE: Variable Reactance FSK (C4FM)		
Maximum Deviation:	±5 kHz			
Spurious Emission:	At le At le	ian version ast 60 dB below (@TX Power High, Middle) ast 50 dB below (@TX Power Low) an version		
	At le	ast 60 dB below (@TX Power High, Middle) ast 55 dB below (@TX Power Low)		
Microphone Impedance:	2 kΩ			

#### Receiver

Circuit Type:	Double-conversion super heterodyne		
Intermediate Frequency:	1st: 47.25 MHz 2nd: 4.50 kHz		
Sensitivity:	108 - 137 MHz (AM) 137 - 174 MHz (NFM) 174 - 222 MHz (NFM) 300 - 350 MHz (NFM) 350 - 400 MHz (NFM) 400 - 470 MHz (NFM) 470 - 580 MHz (NFM)	1.5 μV typ @10 dB SN 0.16 μV @12 dB SINAD 1 μV @12 dB SINAD 0.5 μV @12 dB SINAD 0.2 μV @12 dB SINAD 0.18 μV @12 dB SINAD 0.35 μV @12 dB SINAD	
	Digital Mode	0.19µV typ @BER1%	
Selectivity (-6 dB/-60 dB):	NFM, AM 12 kHz / 35 kHz		
AF Output:	700mW (16 Ω for THD 10 % 300mW (8 Ω for THD 10 %	6 7.4 V DC) internal speaker 7.4 V DC) internal speaker	
Specifications are subject to ch	and without notice, and are	guarantood within the 144 and 4	

Specifications are subject to change without notice, and are guaranteed within the 144 and 430 MHz amateur bands only. Frequency ranges will vary according to transceiver version; check with your dealer.

#### **EU Declaration of Conformity**

We, Yaesu Musen Co. Ltd of Tokyo, Japan, hereby declare that this radio equipment FT-70DE is in full compliance with EU Radio Equipment Directive 2014/53/EU. The full text of the Declaration of Conformity for this product is available to view at http://www. yaesu.com/jp/red

#### **ATTENTION – Conditions of usage**

This transceiver works on frequencies that are regulated and not permitted to be used without authorisation in the EU countries shown in this table. Users of this equipment should check with their local spectrum management authority for licensing conditions applicable for this equipment.

<b>D</b> /						
AT	BE	BG	CY	CZ	DE	
DK	ES	EE	FI	FR	UK	
GR	HR	HU	IE	IT	LT	
LU	LV	MT	NL	PL	PT	
RO	SK	SI	SE	CH	IS	
LI	NO	-	-	-	-	

#### **Disposal of Electronic and Electrical Equipment**

Products with the symbol (crossed-out wheeled bin) cannot be disposed as household waste.

Electronic and Electrical Equipment should be recycled at a facility capable of handling these items and their waste by-products.

Please contact a local equipment supplier representative or service center for information about the waste collection system in your country.

- Changes or modifications to this device that are not expressly approved by YAESU MUSEN could void the user's authorization to operate this device.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference including received, interference that may cause undesired operation.
- The scanning receiver in this equipment is incapable of tuning, or readily being altered, by the User to operate within the frequency bands allocated to the Domestic public Cellular Telecommunications Service in Part 22.
- The YAESU MUSEN is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.
- The YAESU MUSEN is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

#### DECLARATION BY MANUFACTURER

The Scanner receiver is not a digital scanner and is incapable of being converted or modified to a digital scanner receiver by any user.

**WARNING**: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND FEDERAL LAW.

CAN ICES-3 (B) / NMB-3 (B)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy; and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- **Reorient or relocate the receiving antenna.**
- ☐ Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Copyright 2017 YAESU MUSEN CO., LTD. All rights reserved.

No portion of this manual may be reproduced without the permission of YAESU MUSEN CO., LTD.

#### YAESU MUSEN CO., LTD.

Tennozu Parkside Building 2-5-8 Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-0002 Japan

#### YAESU USA

6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

#### YAESU UK

Unit 12, Sun Valley Business Park, Winnall Close Winchester, Hampshire, SO23 0LB, U.K.

1706j-AO-1 Printed in Japan

